


P6102 VHF SEAMASTER PRO SERIES 2.5M ANTENNA


**PACIFIC
AERIALS**

- An excellent solution for bigger boats, or where the installation point is low
- The unique Pro Series design allows the antenna to be removed and remounted at the owner's convenience
- Outstanding electrical performance
- Half-wave design produces a radiation pattern which is especially suitable for small boats
- UltraGlass stands up to high UV and harsh marine environments for years
- The FastFit jack (P1212) on the Pro Series mounts makes installation easy, and guarantees the electrical connection

MOUNTS FOR P6102




P6111



P6113



P6115



P6115



P1212




P1217

- A FastFit UHF plug (P1217) is supplied with the Pro Series mount, and simply screws onto the FastFit jack


TWIN P6102 WITH

P6104 AM/FM SeaMaster Pro Series 2.5m antenna

RADIATION PATTERN

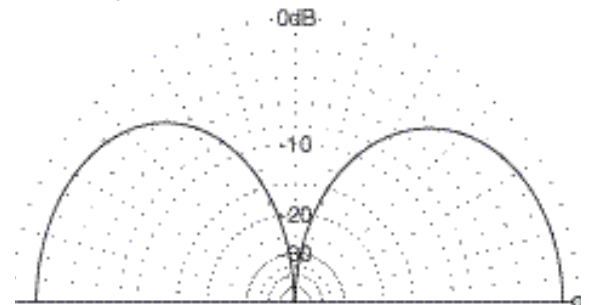

VSWR GRAPH

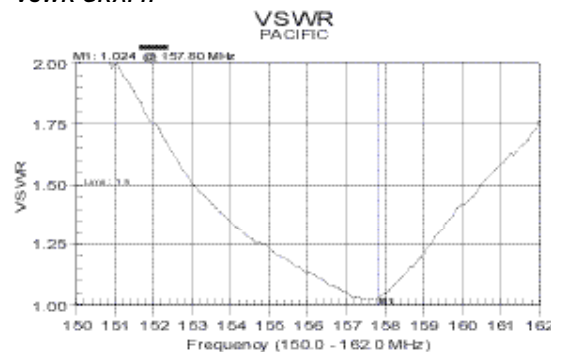

Resolution: 130
Date: 09/09/2003
Model: 8332C

ICAL ON(COAX)
Time: 10:13:23
Serial#: 00212033

GV: OFF

	P6102
Frequency	VHF: 156-162 MHz
Radome	UltraGlass
Ferrule	Glass filled nylon
Antenna Type	Half wave
Gain	3dBi
"Marine Gain"	6dB
Typical VSWR 156.8MHz	<1.2:1
DC Meter Reading	Open Circuit
Height / Weight	2.5m / 330g
Power	50W
Impedance	50 ohms
Cable (on mount)	5m RG-58AU

P6102

PACIFIC AERIALS

11B Ra Ora Drive East Tamaki 2013
PO Box 38421 Howick 2145
Auckland New Zealand

PHONE: +64-9-253 9450

FAX: +64-9-271 6483

EMAIL: info@pacificaerials.com

WEB: www.pacificaerials.com

8.02.10

