

# P6182 VHF SEAMASTER PRO SERIES 1.0M ANTENNA

**PACIFIC  
AERIALS**

- A full performance antenna, ideal in situations where a smaller antenna is desirable
- Unique Pro Series design allows the antenna to be removed and remounted at the owner's convenience
- Outstanding electrical performance
- Half-wave design produces a radiation pattern which is especially suitable for small boats
- UltraGlass stands up to high UV and harsh marine environments for years
- The FastFit jack (P1212) on the Pro Series mounts makes installation easy, and guarantees the electrical connection



P1212




P1217


- A FastFit UHF plug (P1217) is supplied with the Pro Series mount, and simply screws onto the FastFit jack

	P6182
Frequency	VHF: 156-162 MHz
Radome	UltraGlass
Ferrule	Glass filled nylon
Antenna Type	Half-wave
Gain	3dBi
"Marine Gain"	6dB
Typical VSWR 156.8MHz	<1.2:1
DC Meter Reading	Open Circuit
Height / Weight	1.0m / 105g
Power	50W
Impedance	50 ohms
Cable (on mount)	5m RG-58AU

## MOUNTS FOR P6182




P6111



P6113



P6161




P6115


## TWIN P6182 WITH

P6183 AM/FM SeaMaster Pro Series 1.0m antenna

## RADIATION PATTERN

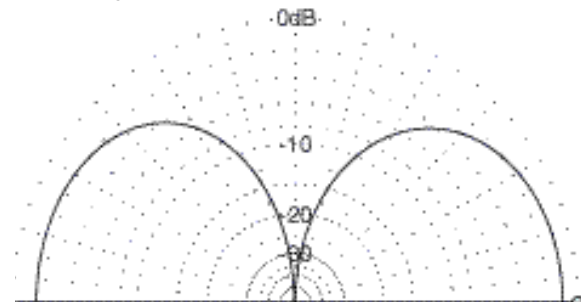

## VSWR GRAPH

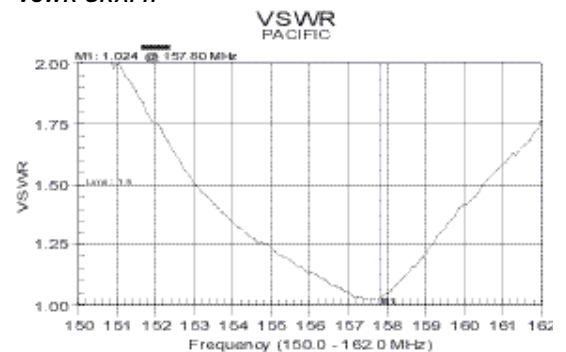

Resolution: 130  
Date: 09/09/2003  
Model: 8332C

ICAL ON(COAX)  
Time: 10.13.23  
Serial#: 00212033

GV: OFF



P6182

15.02.10



## PACIFIC AERIALS

11B Ra Ora Drive East Tamaki 2013  
PO Box 38421 Howick 2145  
Auckland New Zealand

PHONE: +64-9-253 9450

FAX: +64-9-271 6483

EMAIL: [info@pacificaerials.com](mailto:info@pacificaerials.com)

WEB: [www.pacificaerials.com](http://www.pacificaerials.com)